

**NEW UTILITY PATENT APPLICATION
TRANSMITTAL***(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))*Docket No.
STICHTER 3Total pages in this
submission**TO THE ASSISTANT COMMISSIONER FOR PATENTS****Box Patent Application
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**BASE STATION TRANSCEIVER TO RADIO NETWORK CONTROLLER SYNCHRONIZATION
FILTERING FUNCTION**

and invented by:

Allen W. Stichter

IF A CONTINUATION APPLICATION, check appropriate box and supply requisite information:☐

Continuation

☐

Divisional

☐

Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 31 pages(s) and including the following:
 - a. ☒ Descriptive title of the invention
 - b. ☐ Cross references to related applications (*if applicable*)
 - c. ☐ Statement regarding Federally-sponsored research/development (*if applicable*)
 - d. ☐ Reference to microfiche appendix (*if applicable*)
 - e. ☒ Background of the invention
 - f. ☒ Brief summary of the invention
 - g. ☒ Brief description of the drawings (*if drawings filed*)
 - h. ☒ Detailed description
 - i. ☒ Claims as classified below
 - j. ☒ Abstract of the disclosure

- ### Accompanying Application

8. ☒ Assignment papers (*cover sheet & document(s)*)
9. ☐ 37 C.F.R. 3.73(b) statement (*when there is an assignee*)
10. ☐ English translation document (*if applicable*)
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certified copy of priority document(s) (*if foreign priority is claimed*)
15. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Label No.: _____)
16. ☐ Small Entity statement(s) -- # submitted (*if Small Entity status claimed*)

Accompanying Application (continued)

17. ☐ Additional enclosures (please identify below):

--

Fee Calculation and Transmittal

The filing fee for this utility patent application is calculated and transmitted as follows:

☒ Large Entity

☐ Small Entity

CLAIMS AS FILED						
For	# Filed	# Allowed	# Extra	Rate		Fee
Total Claims	47	- 20 =	27	x	\$18.00	\$486.00
Independent Claims	6	- 3 =	3	x	\$78.00	\$234.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>						
Other Fees (specify purpose): Recordation Form Cover Sheet						\$40.00
BASIC FEE						\$690.00
TOTAL FILING FEE						\$1,450.00

☐ A check in the amount of _____ to cover the total filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge and **Deposit Account No. 12 - 2325** as described below. A duplicate copy of this sheet is enclosed.

☒ Charge the amount of \$1,450.00 as filing fee.

☒ Credit any overpayment.

☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.

☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.31(b).

LaS

Dated: March 1, 2000

Thomas J. D'Amico

Attorney Reg. No.: 28,371

Dickstein Shapiro Morin & Oshinsky LLP

2101 L Street NW

Washington, DC 20037-1526

(202) 785-9700

**BASE STATION TRANSCEIVER TO RADIO NETWORK CONTROLLER
SYNCHRONIZATION FILTERING FUNCTION**

Inventor: Allen W. Stichter

BASE STATION TRANSCEIVER TO RADIO NETWORK CONTROLLER SYNCHRONIZATION FILTERING FUNCTION

BACKGROUND OF THE INVENTION

5 1. FIELD OF THE INVENTION

The present invention relates generally to the field of telecommunications and, more particularly, to an accurate time synchronization method having a filtering function for a wireless telecommunications system.

2. DESCRIPTION OF THE RELATED ART

10 Fig. 1 illustrates a schematic diagram of a portion of a typical wireless telecommunications system 100. The system 100 provides wireless communication service to a number of wireless terminals 101-1, 101-2, 101-3 that are situated within a graphical region. The heart of a typical wireless telecommunications system 100 is the Radio Network Controller (RNC) 120, which may also be known as a
15 Mobile Switching Center (MSC) or Mobile Telephone Switching Office (MTSO). Typically, the RNC 120 is connected to a plurality of base station transceivers 103-1, 103-2, 103-3, 103-4, 103-5 that are dispersed throughout the geographic area serviced by the system 100 and to local-offices (L.O.) 130, 138 and toll offices (T.O.) 140. The RNC 120 is responsible for, among other things, establishing and
20 maintaining calls between wireless terminals and between a wireless terminal and a wireline terminal 150, which is connected to the system through local and/or long distance networks.

 The geographic area serviced by the system 100 is partitioned into a number of spatially distinct areas called "cells." In Fig. 1 each cell is schematically
25 represented by a hexagon; in practice, however, each cell usually has an irregular

shape that depends on the topology of the terrain serviced by the system 100.

Typically, each cell contains a base station transceiver (BTS), such as for example BTS 103-1, which includes the radios and antennas that the BTS uses to communicate with the wireless terminals in that cell and also comprises the transmission equipment that the BTS uses to communicate with the RNC 120.

For example, when wireless terminal 101-1 desires to communicate with wireless terminal 101-2, wireless terminal 101-1 transmits the desired information to base station transceiver 103-1, which relays the information to RNC 120. Upon receipt of the information, and with the knowledge that the information is intended for wireless terminal 101-2, the RNC 120 returns the information back to base station transceiver 103-1, which relays the information to the wireless terminal 101-2.

Often times, telecommunications systems, such as the system 100 illustrated in Fig. 1, schedule events that are to take place at specified times. This means that each BTS 103-1, 103-2, 103-3, 103-4, 103-5 within the system 100 must have their time synchronized to each other and to the time of the RNC 120. This is a problem because the components of the system 100, with the exception of the clock master (typically the RNC 120 or an external component connected to the RNC 120), do not know what the actual system time is and, more importantly, they do not know the time of the other components within the system 100. Thus, in order for each component to have the same time as each other and the clock master, a time synchronization method is typically executed when the components of the system 100 are powered-on or reset.

Current time synchronization techniques usually involve distributing a time reference throughout the system via a time synchronization message. Typically, each component in the telecommunications system has a clock that ticks, but the ticks do not correlate to a system time without a clock base. The components within the system store this time reference and begin to use it as a clock base. If all of the components use the same base and their clocks all operate at the same rate, the components should have their time synchronized to each other.

This type of time synchronization technique is not without its shortcomings. For example, this technique does not account for delays that arise between the time the reference time was created by the clock master and the time the other components (i.e., clock slaves) within the system receive the time reference. Thus, the clock slave components will have a base time that differs from the master clock time. The difference between the component time and the master clock time is known in the art as a time error. It is desirable to keep the time error to a minimum to prevent errors within the system. In addition, there is usually a system specification requiring that the time error be kept to a minimum to guarantee customer satisfaction. Often times, however, this time error is very large because of processing delays experienced by the clock master or transmission delays. Moreover, the transmission delays experienced by each component may vary, which means that each component will have a different time error causing additional problems within the system. Accordingly, there is a need and desire for a method of accurately synchronizing the time between the components of a wireless telecommunications system.

SUMMARY OF THE INVENTION

The present invention provides a method of accurately synchronizing the time between the components of a wireless telecommunications system.

The present invention also provides a method of accurately synchronizing
5 the time between the components of a wireless telecommunications system that also filters out undesirable synchronization data.

The above and other features and advantages of the invention are achieved by initiating several time synchronization passes between clock slave components and a clock master component in a wireless telecommunications system.

10 For every pass, each clock slave component generates and transmits a first timing cell to the clock master. The first timing cell contains a transmission time based on the clock slave component's clock. Upon receipt of the first timing cell, the clock master generates and transmits to the clock slave component a second timing cell containing the time the clock master received the first timing cell and the time the
15 master transmitted the second timing cell. Upon receipt of the second timing cell, the clock slave component will obtain its reception time and calculate a transmission delay based on the reception time and the timing information contained in the timing cells. Each clock slave component utilizes a sliding window filtering function to drop information from a synchronization pass that may have undesirable data due
20 to processing and other delays. The filtering function will also restart the synchronization process whenever a calculated transmission delay is smaller than the best transmission delay. This allows the process to accurately hone in on the proper delay experienced between each clock slave component and the clock master. After timing information from a predetermined number of time synchronization passes has

been obtained, each clock slave component uses an average transmission delay to synchronize its time to the clock master time.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other advantages and features of the invention will become more apparent from the detailed description of the preferred embodiments of the invention given below with reference to the accompanying drawings in which:

Fig. 1 is a schematic diagram illustrating a conventional wireless telecommunications system;

Fig. 2 is a block diagram illustrating an exemplary base station used in the wireless telecommunications system of the present invention;

Figs. 3a-3c illustrate in flow chart form an exemplary method of synchronizing the time between the components of a wireless telecommunications system that utilizes a filtering function in accordance with the present invention; and

Fig. 4 illustrates the message transmission and timing information used by the method illustrated in Fig. 3.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Another way to perform time synchronization would be to accumulate timing data samples from several time synchronization communications between the system clock master and the other components within the system (i.e., the clock slave components). Each data sample should represent a transmission delay experienced by the clock master and a slave component during the communication with each other. For example, when the clock master sends a message to a clock slave, the message is not received by the slave until after a transmission delay. If the delay were known, then the delay could be added to the transmitted clock master

time to calculate the current clock master time. This would improve the accuracy of the time synchronization process. The transmission delay may vary from communication to communication. Thus, to get a better judge of the typical transmission delay experienced between the clock master and a clock slave, several samples are used and an average transmission delay is calculated. Each slave component then uses its computed average delay as a time offset during a final synchronization step which synchronizes its clock time to the master clock time. Once synchronized, the clock master and the clock slave components should all have the same system time plus or minus the timing error.

Although the timing error should be smaller than the timing errors of other synchronization techniques, this scheme will also be effected by processing delays. Large processing delays or other errors can cause bad timing data to be used in the average transmission delay calculation. The bad data samples will corrupt the calculated transmission delay and cause an improper offset to be applied in the final synchronization step. Accordingly, there is a desire and need for a method of accurately synchronizing the time between the components of a wireless telecommunications system that also filters out undesirable synchronization data.

The present invention is implemented in software and is to be executed primarily within each base station transceiver of a CDMA system, such as the system 100 illustrated in Fig. 1. It is desirable that the CDMA system utilize an asynchronous transfer mode (ATM) network protocol or like communications protocol so that timing information can be transmitted between the RNC and base station transceivers. Using an ATM network protocol or like communications protocol allows clock information to be transmitted with each ATM message. In

addition, each clock within the system operates at the same rate. Once the various clocks are synchronized by the present invention, all of the system components will have the same time plus or minus a minor timing error. The present invention is designed to reduce the timing error to about four hundred microseconds. For example purposes only, the RNC will be used as the clock master and the base station transceivers (BTSs) will be used as the clock slave components.

Fig. 2 illustrates an exemplary BTS. The BTS includes at least one controller 150, memory circuit 152, antenna 154, radio module 156 and a clock 158 connected in the conventional manner. It should be appreciated that a BTS may contain numerous controllers, but only one controller 150 is illustrated. The controller 150 is preferably a programmed microprocessor. Although Fig. 2 illustrates the controller 150 as a microprocessor (i.e., “ μ p”), the controller 150 may be a digital signal processor or an application specific integrated circuit (ASIC). It is desirable that the controller 150 is a digital signal processor capable of being programmed to execute the method 200 (Figs. 3a-3c) of the present invention. Similarly, the BTS may contain a controller 150 that includes an internal clock as opposed to the clock 158 illustrated in Fig. 2. Moreover, the exact architecture of the BTS is not important as long as it can implement the method of the present invention (discussed below). The radio module 156 contains a plurality of radios 156-1, 156-2 . . . 156-n. As known in the art, the controller 150 is coupled to the memory 152, radio module 156 and clock 158. The controller 150 is also in communication with the RNC. As is also known in the art, the controller 150 controls and coordinates the operations of the BTS including, but not limited to, the call processing and power control functions while also communicating with the

RNC. With the provision of some additional software, the controller 150 will also implement the method 200 of the present invention (described below with reference to Figs. 3a-3c).

Figs. 3a-3c illustrate an exemplary method 200 of synchronizing the time
5 between the components of a wireless telecommunications system. As will be described below, the method 200 utilizes a sliding window filtering function to remove undesirable data caused by large processing delays or other errors.

Removing the undesirable data prevents the synchronization process from being corrupted by the processing delays or other errors. Keeping with our example that
10 the RNC is the clock master and each BTS in the system is a clock slave, the method 200 will be run on each BTS in the system (with the exception of steps 210 to 218, which are run by the RNC).

Initially, the method 200 begins when the BTS initializes any variables needed during the method 200 (step 202). In addition, the BTS will initialize a
15 loop counter N, which will be used to determine the number of time synchronization iterations that have been performed. It is desirable to perform several time synchronization iterations to obtain a good estimate of the actual transmission delays between the BTS and RNC. Although any number of iterations can be used, the inventor has determined that approximately twenty iterations is
20 sufficient to properly synchronize the time in the system. Thus, a maximum number of iterations counter N_MAX is used and should be set to twenty. It should be appreciated that the number of iterations could be dynamic and based on other conditions if so desired.

5

10

15

20

SF_BTS_1. TIMING CELL # 2 is received by the BTS at SF_BTS_2, a time generated by the BTS temporary clock, after a second transmission delay T_2 . As will be described below, after several communications between the BTS and the RNC (referred to herein as “passes”) all of this time information (SF_BTS_1, SF_MCC_1, SF_MCC_2 and SF_BTS_2) is used by the BTS to calculate an average communication delay between the BTS and the RNC. The average delay is subsequently used by the BTS to synchronize its temporary clock to the RNC clock (master clock).

Referring to Figs. 3a-3c and Fig. 4, once the transmission time SF_BTS_1 is obtained in step 204, the BTS generates TIMING CELL # 1 (step 206). As noted earlier, TIMING CELL # 1 will contain the transmission time SF_BTS_1 obtained in step 204. At step 208, the BTS transmits TIMING CELL # 1 to the RNC.

The following steps are performed by the RNC (clock master), which is programmed to receive TIMING CELL # 1 (step 210), format TIMING CELL # 2 (steps 212-216) and transmit TIMING CELL # 2 to the BTS (step 218). Thus, at step 210, the RNC receives TIMING CELL # 1. At step 212, the RNC obtains a reception time SF_MCC_1 of TIMING CELL # 1. The reception time SF_MCC_1 is a time generated by the RNC clock. At step 214, the RNC obtains a transmission time SF_MCC_2 for TIMING CELL # 2. This transmission time SF_MCC_2 is also generated using the RNC clock. At step 216 the RNC generates the second timing cell TIMING CELL # 2. TIMING CELL # 2 will contain the transmission and reception times SF_BTS_1 and SF_MCC_1 of TIMING CELL # 1 and the

transmission time SF_MCC_2 of TIMING CELL # 2. At step 218, the RNC transmits TIMING CELL # 2 to the BTS.

The remaining steps of method 200 are performed by the BTS. At step 220, the BTS receives TIMING CELL # 2. Using its temporary clock, the BTS obtains a reception time SF_BTS_2 of TIMING CELL # 2 (step 222) and increments the iteration loop counter N (step 224). The BTS uses all of the timing information concerning the transmission and reception of the two timing cells to calculate the transmission delay T for the current communication between the BTS and RNC. The transmission delay T can be calculated as follows:

- 10 (1) $T = (SF_BTS_2 - SF_BTS_1 - Td)/2$, where Td is:
 (2) $Td = SF_MCC_2 - SF_MCC_1$.

Once the transmission delay T is calculated and stored (step 226), the method continues at step 228 where the first portion of the sliding window filtering function is executed. Why the filtering function is described as a sliding window will be described below. This portion of the filtering function attempts to determine if this transmission delay T is the “best” transmission delay $BEST_T$ obtained during the method 200. The term “best” is used to indicate the smallest delay computed between the BTS and RNC during the current execution of the method 200. It is desirable that every time a new transmission delay T that is better than the $BEST_T$ is obtained, that the new transmission delay T be stored and used as the $BEST_T$. It is also desirable for the method 200 to reset the number of time synchronization iterations and any accumulated transmission delay to zero. This way, the method 200 will perform the predetermined number of time synchronization iterations as if no data samples have been performed. This is desirable, since the transmission delay

between the BTS and RNC appears to be getting better and is now beginning to settle into the typical delay. Thus, any information up to this point may not accurately reflect the typical transmission delay and should be discarded to prevent the time synchronization results from being corrupted.

5 If at step 228 it is determined that the transmission delay T is less than the
best transmission delay $BEST_T$, then the method continues at step 230 where the
BTS saves the transmission delay T as the best transmission delay $BEST_T$. At step
230 the BTS will also reset the iteration loop counter N and any variables used
during the method 200 (except for $BEST_T$). After step 230 or if it is determined
10 that the transmission delay T is not less than the best transmission delay $BEST_T$,
the method continues at step 232 where the second portion of the filtering function
is performed.

At step 232, the BTS determines the difference T_DIFF between the transmission delay T and the best transmission delay $BEST_T$. It is desirable to filter out any samples that have a large transmission delay T with respect to the best transmission delay $BEST_T$. Filtering out the data samples that have a transmission delay T that is much larger than the best transmission delay $BEST_T$ helps eliminate data samples that are skewed by an unusually large processing delay, communication error or other type of error. By removing these “bad” data samples, the method 200 can hone in on the typical transmission delay experienced between the BTS and RNC which allows the final synchronization step to synchronize the BTS to the RNC master clock that is much more accurate than prior synchronization schemes.

Thus, at step 234 the BTS determines if the calculated T_DIFF is greater than the best transmission delay BEST_T plus a maximum allowed delay difference

microseconds. A feat that prior synchronization schemes cannot achieve.

was incremented at step 224 (when the time samples where obtained). Once the

information is dropped and the counter N is decremented, the method 200 continues at step 240, where it will determine if another iteration is required.

If, however, at step 234 it is determined that the calculated T_DIFF is not greater than the best transmission delay BEST_T plus the maximum allowed delay

5 difference MAX_DIFF, then the method 200 continues at step 238 where the BTS

adds the transmission delay T to the accumulated transmission delay ACCUM_T.

The accumulated transmission delay ACCUM_T will be used to determine the

average transmission delay after all of the iterations are performed. Thus, at step

240, the BTS determines if the iteration loop counter N is less than the

10 predetermined maximum number of allowed iterations N_MAX. If it is determined

that the iteration loop counter N is less than N_MAX, the method 200 continues at

step 204 where another iteration is performed (as described above). If at step 240 it

is determined that the iteration loop counter N is not less than N_MAX, the method

200 continues at step 242 where the BTS calculates the average transmission delay

15 T_AVG. T_AVG is computed as follows:

3) $T_AVG = ACCUM_T / N_MAX$.

At step 244, the average transmission delay T_AVG is used to synchronize the BTS clock to the RNC clock. One way this can be done is to add the last

transmission time SF_MCC_2 of TIMING CELL # 2 to the average transmission

20 delay T_AVG. The result of this addition can be stored away and used as a clock

base which is updated by the clock ticks obtained from the BTS clock. Since the

clocks of every BTS and the RNC operate at the same rate, once the clocks are

synchronized, the clocks should remain synchronized.

Thus, the present invention incorporates a sliding window filtering function into a time synchronization process. Using the sliding window allows the present invention to throw out synchronization data that is not an accurate reflection of the typical transmission delay between the clock master and the clock slave components. The present invention uses the average of the minimum transmission delays to hone in on the typical delay between the clock master and a slave component; by doing so, the present invention is able to accurately determine the time on the clock master's clock. By accurately determining the time on the clock master's clock, the present invention reduces timing errors to approximately four hundred microseconds, which is at least one order of magnitude better than prior synchronization techniques. Moreover, the present invention uses a running total of the transmission delays and an average of the accumulated delays. This allows the method of the present invention to operate in a fast and efficient manner. Since the method 200 is implemented in software, it may be ported to other wireless communications systems or to any system that requires an accurate distribution of time between components having synchronous clocks.

The method of the present invention is implemented in software and the software instructions and data can be stored in PROM, EEPROM or other non-volatile memory connected to or contained within the controller. The software used in the present invention can be stored on a hard drive, floppy disc, CD-ROM or other permanent or semi-permanent storage medium and subsequently transferred to the memory of the controller. The program embodying the method of the present invention can also be divided into program code segments, downloaded, for

example, from a server computer or transmitted as a data signal embodied in a carrier wave to the controller as is known in the art.

While the invention has been described in detail in connection with the preferred embodiments known at the time, it should be readily understood that the invention is not limited to such disclosed embodiments. Rather, the invention can be modified to incorporate any number of variations, alterations, substitutions or equivalent arrangements not heretofore described, but which are commensurate with the spirit and scope of the invention. Accordingly, the invention is not to be seen as limited by the foregoing description, but is only limited by the scope of the appended claims.

What is claimed as new and desired to be protected by Letters Patent of the United States is:

007060567350

1. A method of performing time synchronization between a clock master having a first clock and a clock slave having a second clock, said method comprising the steps of:

5 sending a first message to the clock master, the first message comprising information indicating a first transmission time of the first message;

receiving a second message from the clock master, the second message comprising information indicating a first reception time of the first message and a second transmission time of the second message;

10 obtaining at the clock slave a second reception time of the second message;

calculating a transmission delay between the clock slave and clock master from the first and second reception times and the first and second transmission times; and

15 determining if the calculated transmission delay is within a window of acceptable delays and updating an accumulated delay with the calculated transmission delay if the calculated transmission delay is within the window.

20 2. The method of claim 1 further comprising repeating said first message sending step through said determining step until a termination condition is met.

3. The method of claim 2 further comprising synchronizing the second clock to the first clock using the accumulated delay.

25 4. The method of claim 3 wherein said synchronizing step comprises: computing an average delay from the accumulated delay; and applying the average delay as an offset to a time of the second clock.

5. The method of claim 4 wherein said average delay is computed by dividing the accumulated delay by a maximum number of times said first message sending step through said determining step are to be repeated.

5

6. The method of claim 2 wherein said method calculates a number of times said method executes said first message sending step through said determining step and terminates after said number of times equals a predefined number of times.

10

7. The method of claim 6 wherein said predefined number of times is twenty.

15

8. The method of claim 1 wherein said window is a sliding window such that thresholds of said window are adjusted whenever a minimum calculated transmission delay is obtained.

20

9. The method of claim 8 wherein the sliding window comprises a first threshold representing a best delay and a second threshold representing a maximum allowable difference from the best delay, wherein the best delay represents a calculated transmission delay with a smallest delay in comparison to other calculated transmission delays.

25

10. The method of claim 9 wherein said step of determining if the calculated transmission delay is within the window comprises:
determining if said calculated transmission delay is less than the best delay;
and

if the calculated transmission delay is less than the best delay, storing the calculated transmission delay as the best delay, discarding the calculated transmission delay, resetting the accumulated delay and ensuring that said method executes said first message sending step through said determining step an additional number of
5 times.

11. The method of claim 1 wherein said step of determining if the calculated transmission delay is within the window comprises:

determining if said calculated transmission delay is less than a best delay,
10 wherein the best delay represents a calculated transmission delay with a smallest delay in comparison to other calculated transmission delays; and

if the calculated transmission delay is less than the best delay, storing the calculated transmission delay as the best delay, discarding the calculated transmission delay, resetting the accumulated delay and ensuring that said method executes said
15 first message sending step through said determining step an additional number of times.

12. The method of claim 11 wherein said step of determining if the calculated transmission delay is within the window further comprises:

20 calculating a difference between said calculated transmission delay and the best delay;

determining if the calculated difference exceeds a maximum allowable difference; and

if the calculated difference exceeds the maximum allowable difference,
25 discarding the calculated transmission delay, and ensuring that said method executes said first message sending step through said determining step an additional time.

13. The method of claim 1 wherein the first transmission and first reception times of the first message are generated using the second clock.

5 14. The method of claim 1 wherein the second transmission and second reception times of the second message are generated using the first clock.

15. The method of claim 1 wherein said step of calculating the transmission delay comprises:

10 calculating a round trip delay by taking a difference between the second reception time and the first transmission time;

 calculating a clock master delay by taking a difference between the second transmission time and the first reception time; and

15 computing the transmission delay by halving a difference between the round trip delay and the clock master delay.

16. The method of claim 1 wherein the first and second clock are synchronous.

20 17. A method of performing time synchronization between a clock master and a clock slave, said method comprising the steps of:

 receiving a first message from the clock slave;

 sending a second message to the clock slave;

 calculating a transmission delay between the clock slave and clock master

25 from reception and transmission times of the first and second messages;

determining if the calculated transmission delay is within a window of acceptable delays and updating an accumulated delay with the calculated transmission delay if the calculated transmission delay is within the window.

5 18. The method of claim 17 further comprising repeating said first message receiving step through said determining step until a termination condition is met.

10 19. The method of claim 18 further comprising synchronizing a clock of the clock slave to a clock of the clock master using the accumulated delay.

15 20. The method of claim 17 wherein said window is a sliding window such that thresholds of said window are adjusted whenever a minimum calculated transmission delay is obtained.

20 21. The method of claim 20 wherein the sliding window comprises a first threshold representing a best delay and a second threshold representing a maximum allowable difference from the best delay, wherein the best delay represents a calculated transmission delay with a smallest delay in comparison to other calculated transmission delays.

22. The method of claim 21 wherein said step of determining if the calculated transmission delay is within the window comprises:

25 determining if said calculated transmission delay is less than the best delay;
and

5

10

15

20

25

25. A base station for use in a wireless telecommunications system comprising:

a clock; and

5 a controller, said controller for:

sending a first message to a clock master of said system comprising information indicating a first transmission time of the first message;

10 receiving a second message from the clock master comprising information indicating a first reception time of the first message and a second transmission time of the second message;

obtaining a second reception time of the second message;

calculating a transmission delay from the first and second reception times and the first and second transmission times; and

15 determining if the calculated transmission delay is within a window of acceptable delays and updating an accumulated delay with the calculated transmission delay if the calculated transmission delay is within the window.

26. The base station of claim 25 wherein said controller synchronizes said clock to a clock of the clock master using the accumulated delay.

20

27. The base station of claim 26 wherein said controller synchronizes said clock by:

computing an average delay from the accumulated delay; and

applying the average delay as an offset to a time of said clock.

25

28. The base station of claim 27 wherein said controller calculates a number of times it sends said first message and synchronizes said clock after sending the first message a desired number of times.

5 29. The base station of claim 28 wherein said desired number of times is twenty.

10 30. The base station of claim 25 wherein said window is a sliding window such that thresholds of said window are adjusted whenever a minimum calculated transmission delay is obtained.

15 31. The base station of claim 30 wherein said sliding window comprises a first threshold representing a best delay and a second threshold representing a maximum allowable difference from the best delay, wherein the best delay represents a calculated transmission delay with a smallest delay in comparison to other calculated transmission delays.

20 32. The base station of claim 31 wherein said controller determines if the calculated transmission delay is within the window by:

 determining if the calculated transmission delay is less than the best delay;
and

 if the calculated transmission delay is less than the best delay, storing the calculated transmission delay as the best delay, discarding the calculated transmission delay, resetting the accumulated delay and re-sending the first message an additional
25 number of times.

33. The base station of claim 25 wherein said controller determines if the calculated transmission delay is within the window by:

determining if said calculated transmission delay is less than a best delay, wherein the best delay represents a calculated transmission delay with a smallest delay in comparison to other calculated transmission delays; and

if the calculated transmission delay is less than the best delay, storing the calculated transmission delay as the best delay, discarding the calculated transmission delay, resetting the accumulated delay and re-sending the first message an additional number of times.

34. The base station of claim 33 wherein controller further determines if the calculated transmission delay is within the window by:

calculating a difference between said calculated transmission delay and the best delay;

determining if the calculated difference exceeds a maximum allowable difference; and

if the calculated difference exceeds the maximum allowable difference, discarding the calculated transmission delay, and re-sending said first message an additional time.

35. The base station of claim 25 wherein the first transmission and first reception times of the first message are generated using said clock of said base station.

36. The base station of claim 25 wherein the second transmission and second reception times of the second message are generated using the clock of the clock master.

5 37. The base station of claim 25 wherein said controller is a programmed processor.

38. The base station of claim 25 wherein said controller is an application specific integrated circuit (ASIC).

10

39. The base station of claim 25 wherein said controller calculates the transmission delay by:

calculating a round trip delay by taking a difference between the second reception time and the first transmission time;

15

calculating a clock master delay by taking a difference between the second transmission time and the first reception time; and

computing the transmission delay by halving a difference between the round trip delay and the clock master delay.

20

40. The base station of claim 25 wherein said clock of said base station and the clock of the clock master are synchronous.

41. The base station of claim 25 wherein said telecommunications system is a CDMA system.

25

5

10

15

20

25

a second clock; and

a controller, said controller for:

sending a first message to said clock master;

receiving a second message from said clock master;

calculating a transmission delay from reception and transmission times of the first and second messages;

determining if the calculated transmission delay falls within a window of acceptable delays, updating an accumulated delay with the calculated

5 transmission delay if the calculated delay is within the window; and

synchronizing said second clock to said first using the accumulated delay.

ABSTRACT

A method that initiates several time synchronization passes between clock slave components and a clock master component in a wireless telecommunications system is provided. For every pass, each clock slave component generates and transmits a first timing cell to the clock master. The first timing cell contains a transmission time based on the clock slave component's clock. Upon receipt of the first timing cell, the clock master generates and transmits to the clock slave component a second timing cell containing the time the clock master received the first timing cell and the time the master transmitted the second timing cell. Upon receipt of the second timing cell, the clock slave component will obtain its reception time and calculate a transmission delay based on the reception time and the timing information contained in the timing cells. Each clock slave component utilizes a filtering function to drop information from a synchronization pass that may have undesirable data due to processing and other delays. The filtering function will also restart the synchronization process whenever a calculated transmission delay is smaller than the best delay. This allows the process to accurately hone in on the proper delay experienced between each clock slave component and the clock master. After timing information from a predetermined number of time synchronization passes has been obtained, each clock slave component uses an average transmission delay to synchronize its time to the clock master time.

FIG. 1
(PRIOR ART)

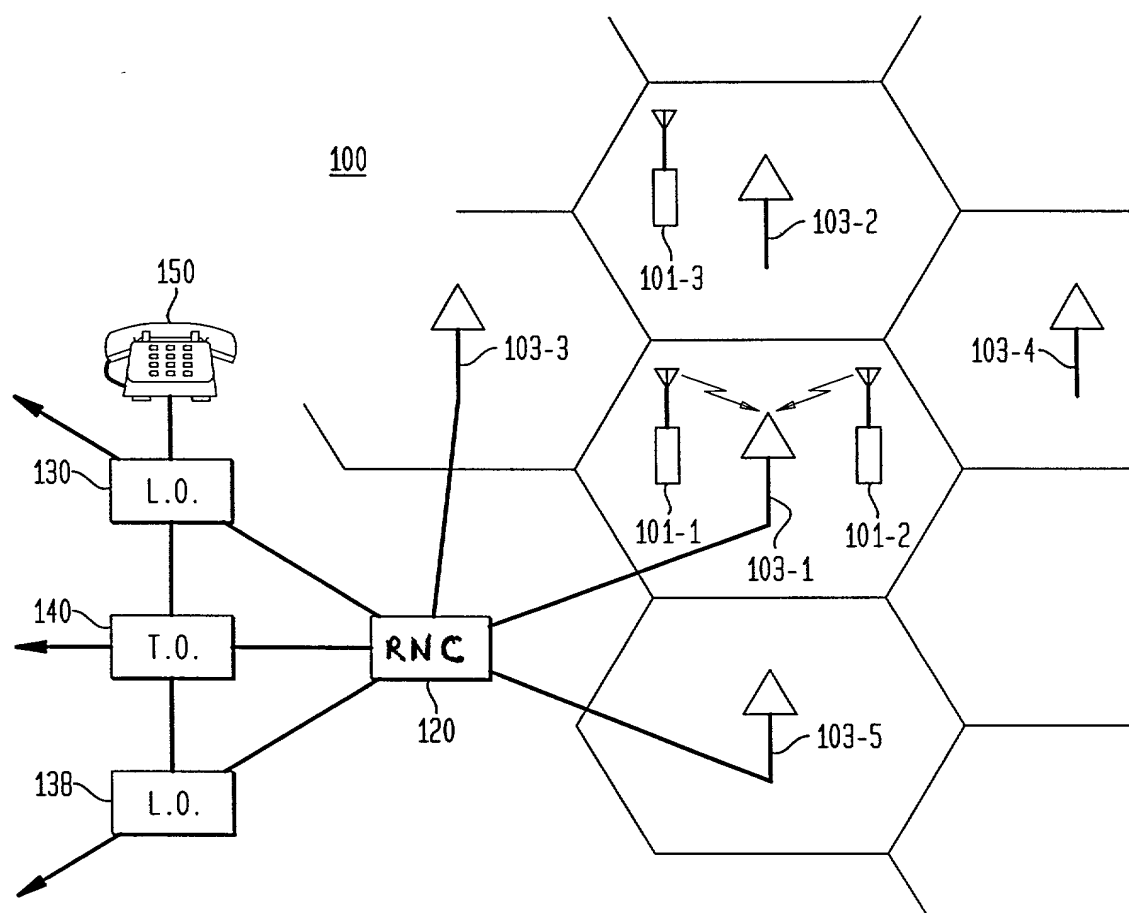
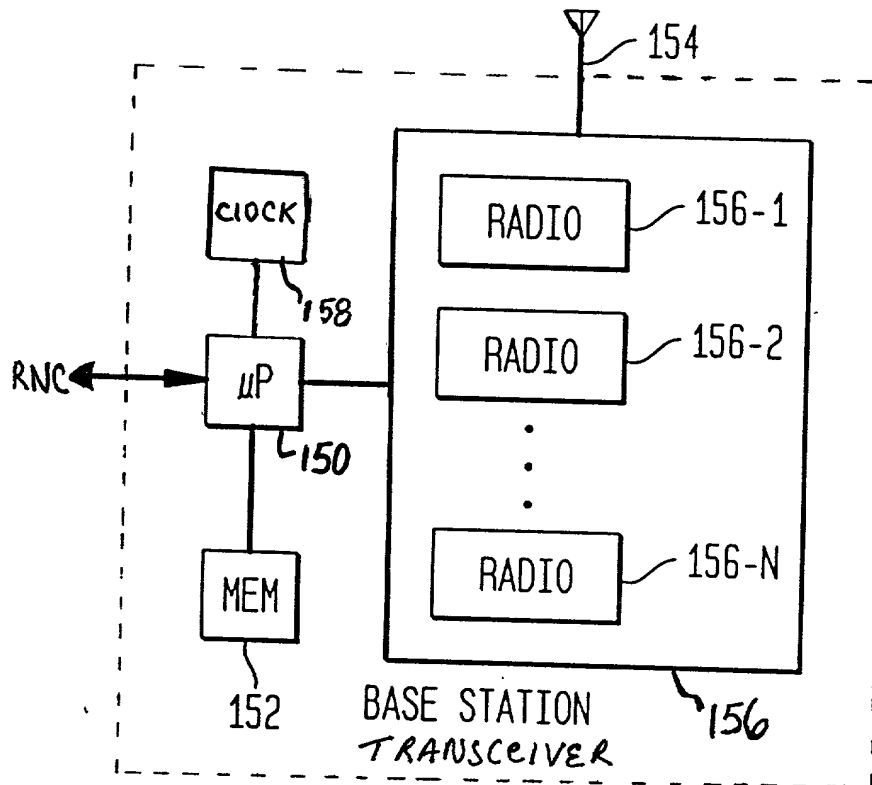


FIG. 2



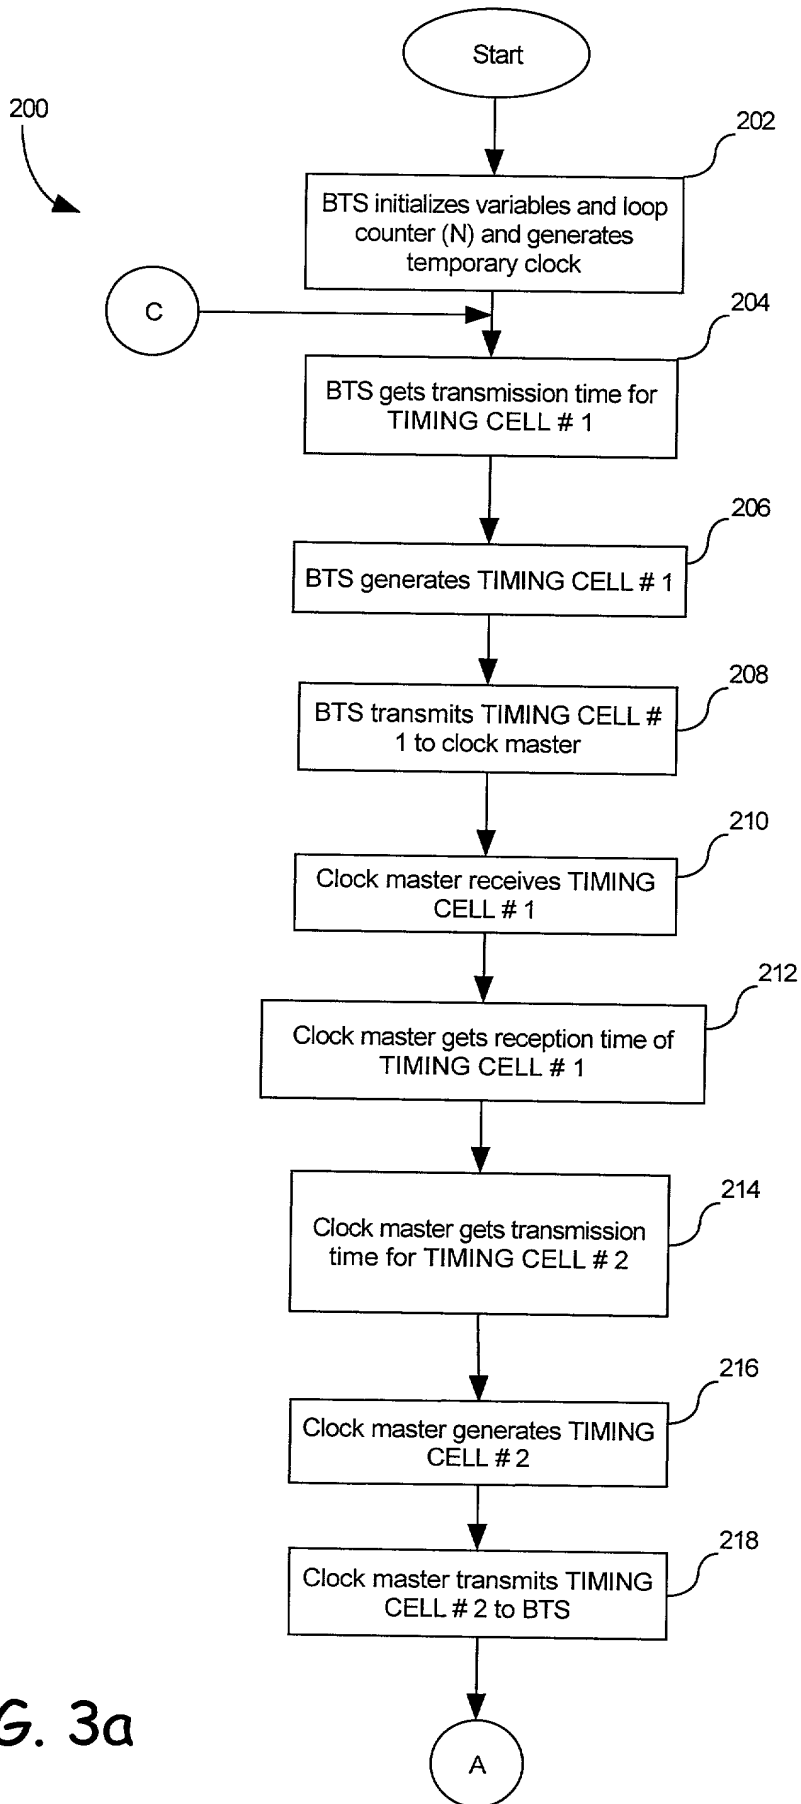


FIG. 3a

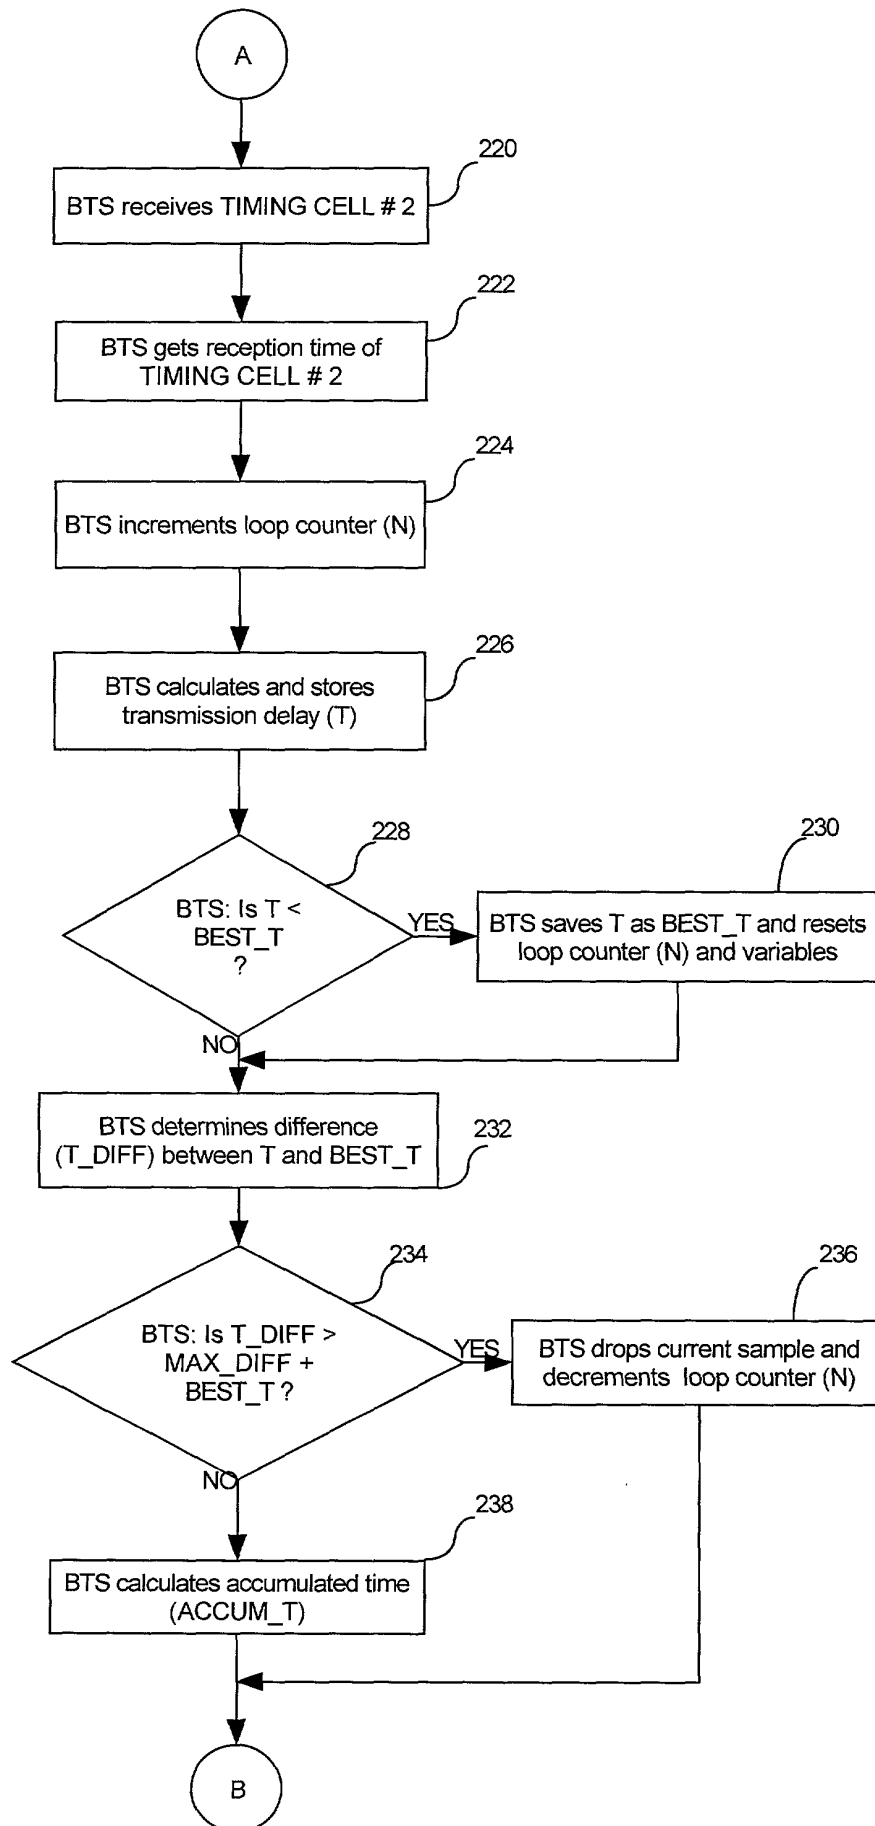


FIG. 3b

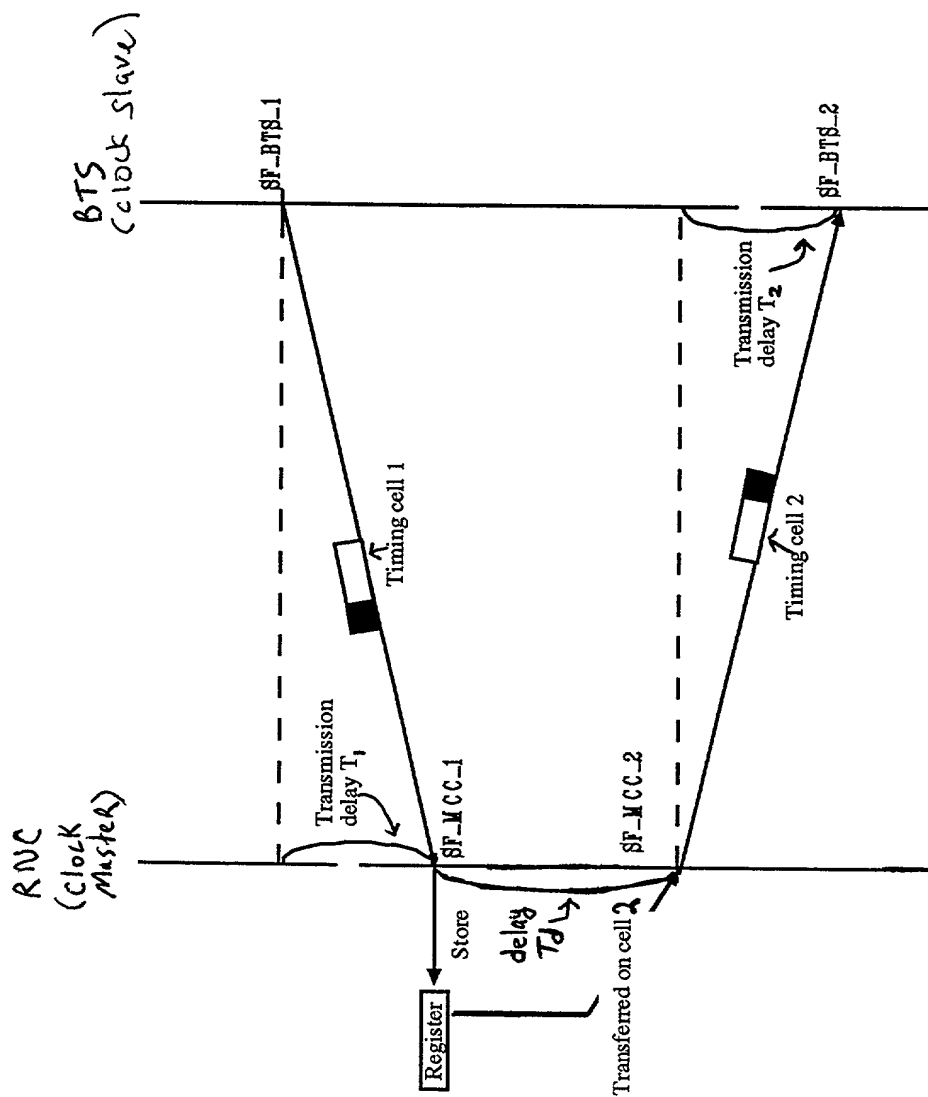


Fig. 4

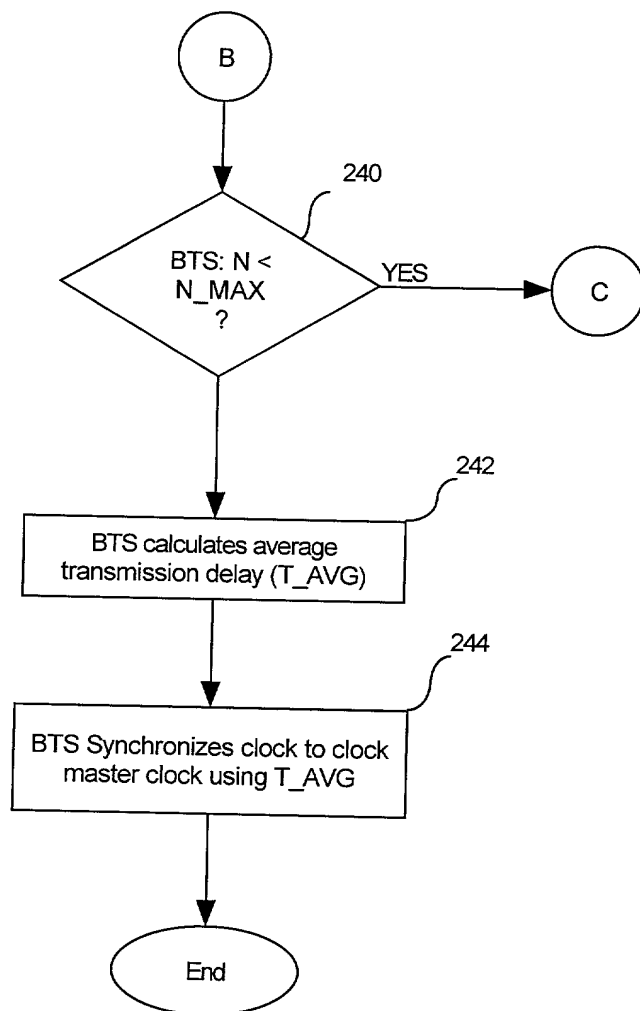


FIG. 3c

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **BASE STATION TRANSCEIVER TO RADIO NETWORK CONTROLLER SYNCHRONIZATION FILTERING FUNCTION** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

L7480.0182/P182
1075515 v1. N1VF01! DOC

David Volejnicek	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Jeffrey M. Weinick	(Reg. No. 36304)
Eli Weiss	(Reg. No. 17765)

I hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Full name of sole inventor: Allen W. Stichter

Inventor's signature Allen W. Stichter Date Feb. 19, 2008

Residence: Flemington, Hunterdon County, New Jersey

Citizenship: United States

Post Office Address: 116 Oak Grove Road
Flemington, NJ 08822

ATTACHMENT A

Attorney Name(s):	<u>Gary M. Hoffman</u>	Reg. No.:	<u>26,411</u>
	<u>Thomas J. D'Amico</u>		<u>28,371</u>
	<u>Donald A. Gregory</u>		<u>28,954</u>
	<u>James W. Brady, Jr.</u>		<u>32,115</u>
	<u>Jon D. Grossman</u>		<u>32,699</u>
	<u>Mark J. Thronson</u>		<u>33,082</u>
	<u>Laurence D. Fisher</u>		<u>37,131</u>
	<u>Brian A. Lemm</u>		<u>43,748</u>
	<u>Gianni Minutoli</u>		<u>41,198</u>
	<u>Eric Oliver</u>		<u>35,307</u>
	<u>William E. Powell, III</u>		<u>39,803</u>
	<u>Salvatore P. Tamburo</u>		<u>45,153</u>

Telephone calls should be made to **Thomas J. D'Amico** at:

Phone No.: (202) 828 - 2232

Fax No.: (202) 887 - 0689

All written communications are to be addressed to:

Thomas J. D'Amico, Esq.
Dickstein Shapiro Morin & Oshinsky LLP
2101 L Street, NW
Washington, D.C. 20037-1526